

Kanazawa Flood Hazard Map

Konan Area (North)

Flood (estimated maximum scale)
that occurs once every
1000 years or more

Rainfall criteria prerequisite for estimated flooding area designation

This hazard map shows the expected result of the following rivers overflowing due to the amount of rainfall detailed below (which only occurs once every 1000 years or more).

- Relevant rivers and rainfall amount:
Asanogawa River: 914mm of rainfall in two days
Kanakusarigawa River: 938mm of rainfall in two days
Morimotogawa River: 919mm of rainfall in two days
Tsubatagawa River: 929mm of rainfall in two days
Onogawa River/ Kahoku Lagoon: 768mm of rainfall in two days
Unoegawa River: 938mm of rainfall in two days
- Rivers other than the relevant rivers:
Kahoku Lagoon West Intercepting Drain, Omiyagawa River
813mm of rainfall in 24 hrs over the entire basin

Estimated flooding areas and flood water depth may differ from the map due to rainfall exceeding the estimated maximum scale, sediment, fallen trees, etc.



Kanazawa Flood Hazard Map

Konan Area (North)



Flood (estimated flood scale)
that occurs approx.
once every 50-100 years

Rainfall criteria prerequisite for estimated flooding area designation

This hazard map shows the expected result of the following rivers overflowing due to the amount of rainfall detailed below (which only occurs approx. once every 50-100 years).

- Relevant rivers and rainfall amount:
Asanogawa River: 256mm of rainfall in two days
Kanakusarigawa River: 237mm of rainfall in two days
Morimotogawa River: 237mm of rainfall in two days
Tsubatagawa River: 237mm of rainfall in two days
Onogawa River/ Kahoku Lagoon: 256mm of rainfall in two days
Unogawa River: 237mm of rainfall in two days

Estimated flooding areas and flood water depth may differ from the map due to rainfall exceeding the estimated scale, sediment, fallen trees, etc.

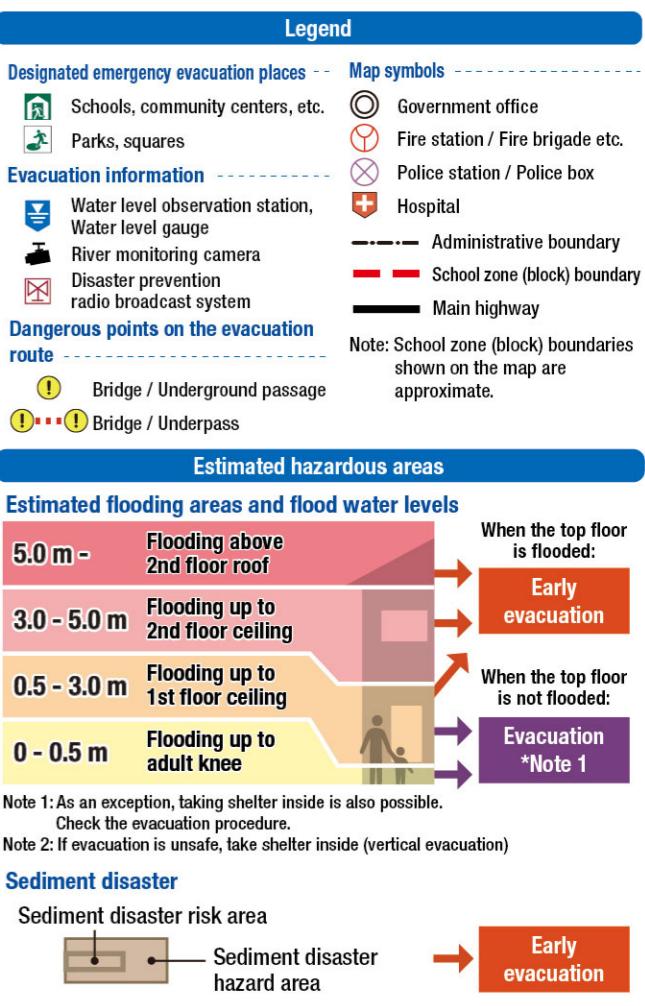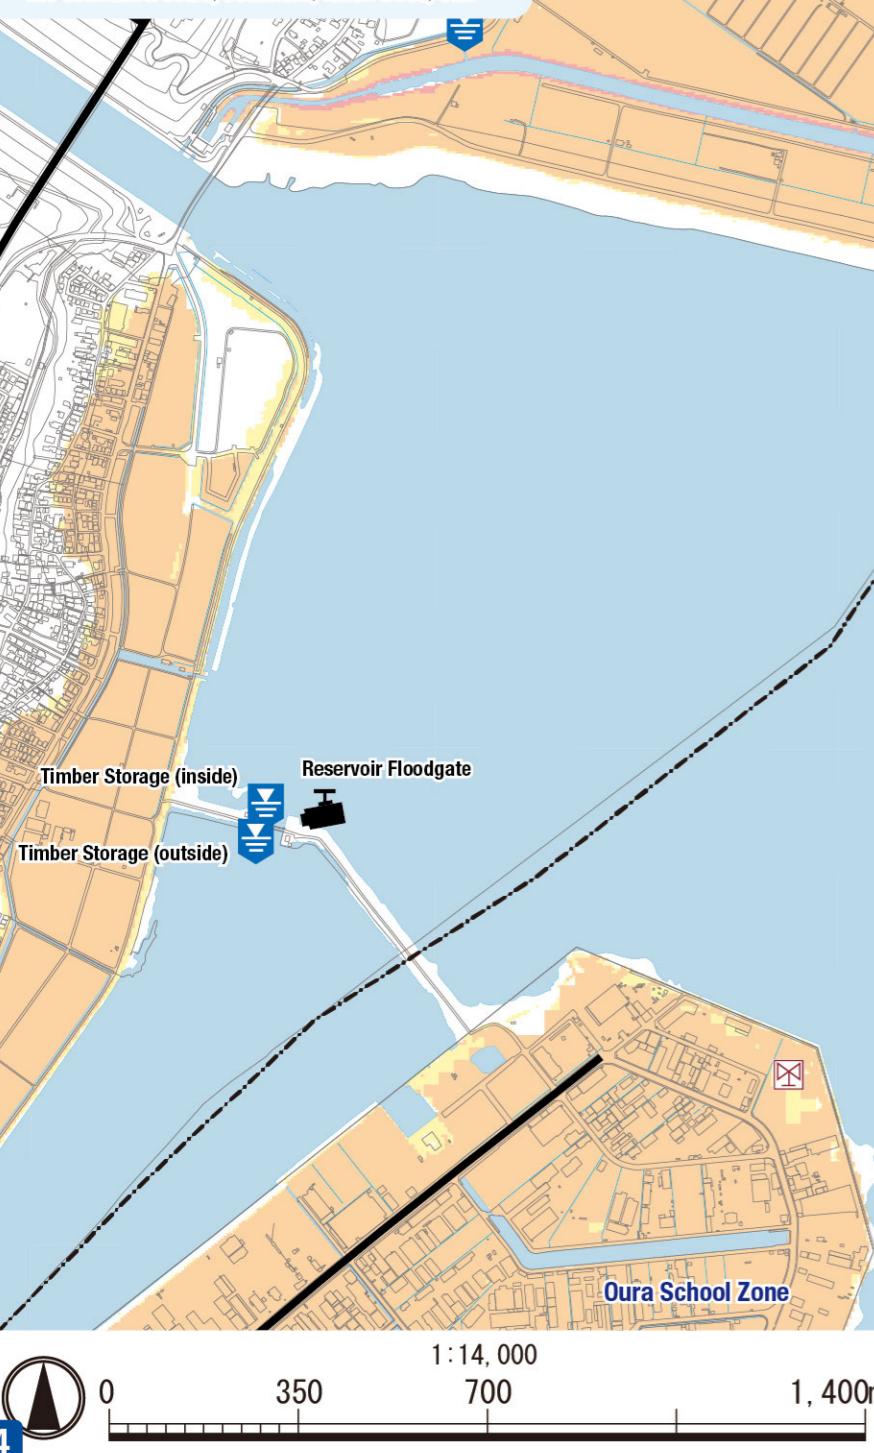

Kanazawa Flood Hazard Map

Konan Area (North)

Inland flood (estimated maximum scale)


that occurs once every 1000 years or more

Rainfall criteria prerequisite for estimated flooding area designation

This hazard map shows the expected result of the amount of rainfall detailed below (which only occurs once every 1000 years or more) in the area of the sewage work plan.

Inland water: 130 mm of rainfall in one hour

Estimated flooding areas and flood water depth may differ from the map due to rainfall exceeding the estimated maximum scale, sediment, fallen trees, etc.

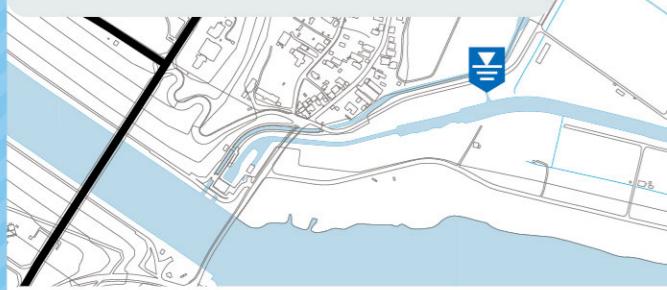

Legend

Designated emergency evacuation places - - - Map symbols - - -

- Schools, community centers, etc.
- Parks, squares
- Government office
- Fire station / Fire brigade etc.
- Police station / Police box
- Hospital

Evacuation information - - -

- Water level observation station, Water level gauge
- River monitoring camera
- Disaster prevention radio broadcast system
- Administrative boundary
- School zone (block) boundary
- Main highway

Dangerous points on the evacuation route - - -

- Bridge / Underground passage
- Bridge / Underpass

Note: School zone (block) boundaries shown on the map are approximate.

Estimated hazardous areas

Estimated flooding areas and flood water levels

5.0 m -	Flooding above 2nd floor roof	When the top floor is flooded:	Early evacuation
3.0 - 5.0 m	Flooding up to 2nd floor ceiling		
0.5 - 3.0 m	Flooding up to 1st floor ceiling	When the top floor is not flooded:	Evacuation *Note 1
0 - 0.5 m	Flooding up to adult knee		

Note 1: As an exception, taking shelter inside is also possible.

Check the evacuation procedure.

Note 2: If evacuation is unsafe, take shelter inside (vertical evacuation)

Sediment disaster

Sediment disaster risk area

Early evacuation

Historically flooded areas

Historically flooded areas

* Areas where inundation occurred due to heavy rain between 2008 and 2024

1:14,000

0

350

700

1,400m

