

# Kanazawa Flood Hazard Map

## Konan Area (South)

Flood (estimated maximum scale)  
that occurs once every  
1000 years or more

Rainfall criteria prerequisite for estimated flooding area designation

This hazard map shows the expected result of the following rivers overflowing due to the amount of rainfall detailed below (which only occurs once every 1000 years or more).

- Relevant rivers and rainfall amount:  
Asanogawa River: 914mm of rainfall in two days  
Kanakusarigawa River: 938mm of rainfall in two days  
Morimotogawa River: 919mm of rainfall in two days  
Tsubatagawa River: 929mm of rainfall in two days  
Onogawa River/ Kahoku Lagoon: 768mm of rainfall in two days  
Unoegawa River: 938mm of rainfall in two days
- Rivers other than the relevant rivers:  
Kahoku Lagoon West Intercepting Drain, Omiyagawa River  
813mm of rainfall in 24 hrs over the entire basin

Estimated flooding areas and flood water depth may differ from the map due to rainfall exceeding the estimated maximum scale, sediment, fallen trees, etc.

### Legend

#### Designated emergency evacuation places

- Schools, community centers, etc.
- Parks, squares

#### Evacuation information

- Water level observation station, Water level gauge
- River monitoring camera
- Disaster prevention radio broadcast system


#### Dangerous points on the evacuation route

- Bridge / Underground passage
- Bridge / Underpass

#### Map symbols

- Government office
- Fire station / Fire brigade etc.
- Police station / Police box
- Hospital
- Administrative boundary
- School zone (block) boundary
- Main highway

Note: School zone (block) boundaries shown on the map are approximate.

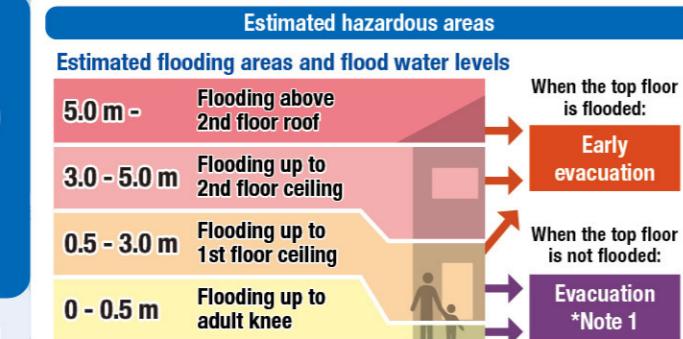

Note 1: As an exception, taking shelter inside is also possible.

Check the evacuation procedure.

Note 2: If evacuation is unsafe, take shelter inside (vertical evacuation)

#### Areas where buildings may collapse or be washed away

- Areas where bank erosion may occur
- Areas where overflow may occur

#### Sediment disaster

Sediment disaster risk area

- Sediment disaster hazard area

### Designated Evacuation Locations

Facility Names	Address	Tel	Availability
Main	Konan Kominkan Community Ctr.	1459-1 Hatta-machi Higashi	258-0023 2nd floor and above
	Kanazawa Koyo High School	Higashi-590 Oba-machi	258-2355 2nd floor and above



# Kanazawa Flood Hazard Map

## Konan Area (South)

Flood (estimated flood scale)  
that occurs approx.  
once every 50-100 years

Rainfall criteria prerequisite for estimated flooding area designation

This hazard map shows the expected result of the following rivers overflowing due to the amount of rainfall detailed below (which only occurs approx. once every 50-100 years).

- Relevant rivers and rainfall amount:  
Asanogawa River: 256mm of rainfall in two days  
Kanakusarigawa River: 237mm of rainfall in two days  
Morimotogawa River: 237mm of rainfall in two days  
Tsubatagawa River: 237mm of rainfall in two days  
Onogawa River/ Kahoku Lagoon: 256mm of rainfall in two days  
Unoegawa River: 237mm of rainfall in two days

Estimated flooding areas and flood water depth may differ from the map due to rainfall exceeding the estimated scale, sediment, fallen trees, etc.

### Legend

Designated emergency evacuation places

- Schools, community centers, etc.
- Parks, squares

Evacuation information

- Water level observation station, Water level gauge
- River monitoring camera
- Disaster prevention radio broadcast system

Dangerous points on the evacuation route


- Bridge / Underground passage
- Bridge / Underpass

Map symbols

- Government office
- Fire station / Fire brigade etc.
- Police station / Police box
- Hospital
- Administrative boundary
- School zone (block) boundary
- Main highway

Note: School zone (block) boundaries shown on the map are approximate.

\*2nd floor and above available

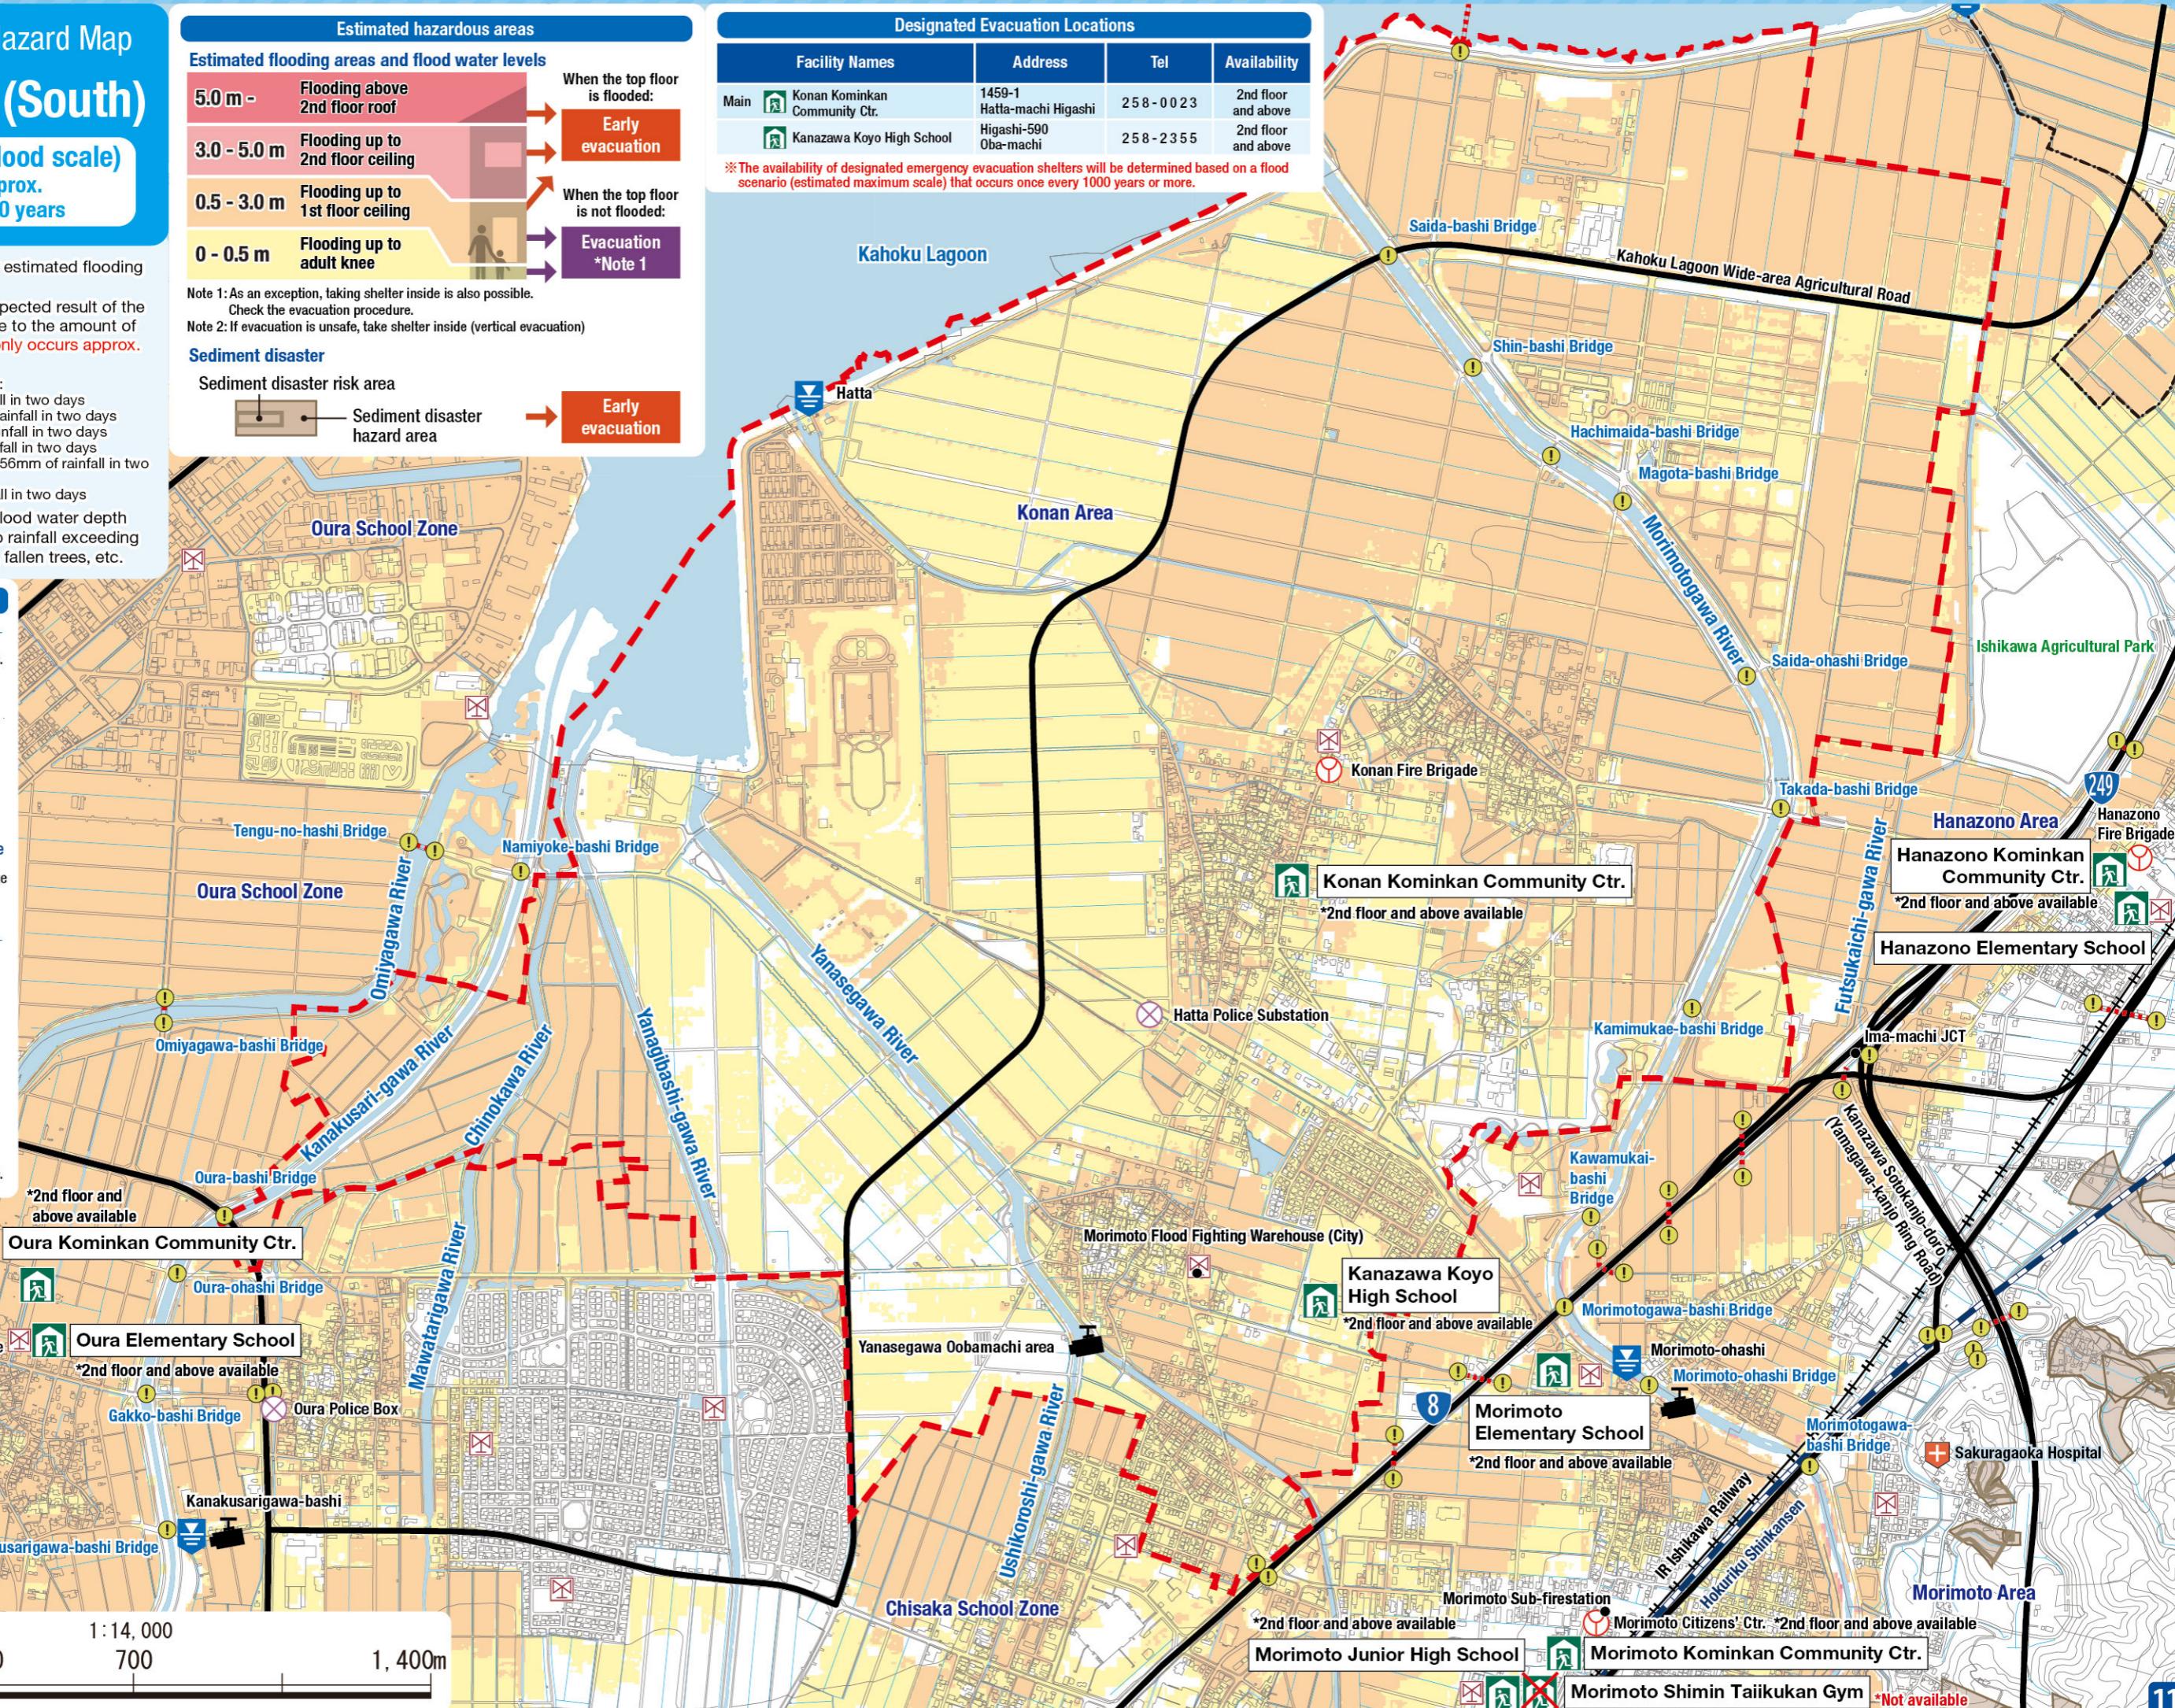

# Kanazawa Flood Hazard Map

## Konan Area (South)

### Inland flood (estimated maximum scale)

that occurs once every 1000 years or more

Rainfall criteria prerequisite for estimated flooding area designation

This hazard map shows the expected result of the amount of rainfall detailed below (which only occurs once every 1000 years or more) in the area of the sewage work plan.

Inland water: 130 mm of rainfall in one hour

Estimated flooding areas and flood water depth may differ from the map due to rainfall exceeding the estimated maximum scale, sediment, fallen trees, etc.

### Legend

Designated emergency evacuation places	Map symbols
Schools, community centers, etc.	○ Government office
Parks, squares	○ Fire station / Fire brigade etc.

Evacuation information	Map symbols
Water level observation station, Water level gauge	○ Government office
River monitoring camera	○ Fire station / Fire brigade etc.
Disaster prevention radio broadcast system	○ Police station / Police box
Hospital	○ Police station / Police box

Dangerous points on the evacuation route	Map symbols
Bridge / Underground passage	○ Government office
Bridge / Underpass	○ Fire station / Fire brigade etc.

### Estimated hazardous areas

Estimated flooding areas and flood water levels	
5.0 m -	Flooding above 2nd floor roof
3.0 - 5.0 m	Flooding up to 2nd floor ceiling
0.5 - 3.0 m	Flooding up to 1st floor ceiling
0 - 0.5 m	Flooding up to adult knee

Note 1: As an exception, taking shelter inside is also possible.

Check the evacuation procedure.

Note 2: If evacuation is unsafe, take shelter inside (vertical evacuation)

### Sediment disaster

Sediment disaster risk area

●	Sediment disaster hazard area
→	Early evacuation

### Historically flooded areas

■	Historically flooded areas
→	* Areas where inundation occurred due to heavy rain between 2008 and 2024

1:14,000

0

350

