

Ono-machi

Flood (estimated maximum scale)
that occurs once every
1000 years or more

Rainfall criteria prerequisite for estimated flooding area designation

This hazard map shows the expected result of the following rivers overflowing due to the amount of rainfall detailed below (which only occurs once every 1000 years or more).

- Relevant rivers and rainfall amount:
Saigawa River: 860mm of rainfall in two days
Asanogawa River: 914mm of rainfall in two days

Estimated flooding areas and flood water depth may differ from the map due to rainfall exceeding the estimated maximum scale, sediment, fallen trees, etc.

Legend

Designated emergency evacuation places

Schools, community centers, etc.

Parks, squares

Water level observation station, Water level gauge

River monitoring camera

Disaster prevention radio broadcast system

Evacuation information

Dangerous points on the evacuation route

Bridge / Underground passage

Bridge / Underpass

Map symbols

Government office

Fire station / Fire brigade etc.

Police station / Police box

Hospital

Administrative boundary

School zone (block) boundary

Main highway

Note: School zone (block) boundaries shown on the map are approximate.

Estimated hazardous areas

Estimated flooding areas and flood water levels

5.0 m - Flooding above 2nd floor roof

3.0 - 5.0 m Flooding up to 2nd floor ceiling

0.5 - 3.0 m Flooding up to 1st floor ceiling

0 - 0.5 m Flooding up to adult knee

When the top floor is flooded:

Early evacuation

When the top floor is not flooded:

Evacuation *Note 1

Note 1: As an exception, taking shelter inside is also possible. Check the evacuation procedure.
Note 2: If evacuation is unsafe, take shelter inside (vertical evacuation)

Areas where buildings may collapse or be washed away

Areas where bank erosion may occur

Areas where overflow may occur

Early evacuation

Sediment disaster

Sediment disaster risk area

Sediment disaster hazard area

Early evacuation

Designated Evacuation Locations

Facility Names	Address	Tel	Availability
Main Ono-machi Elementary School	1-15 Ono-machi	2 67 - 1 46 6	2nd floor and above
Ono-machi Kominkan Community Ctr.	1-8-5 Ono-machi	2 68 - 3 89 6	2nd floor and above

Sea of Japan

Kanazawa Port

Ono-machi

Kanaiwa-machi School Zone

Daitoku Area

Muryoji-bashi Bridge

Muryoji-ohashi Bridge

Matto-Uhoke Road

Ono-machi Fire Brigade

Ono-machi Police Substation

Ono-machi Kominkan Community Ctr.

Ono-machi Elementary School

Kanaiwa-machi Elementary School

Shojuso

Kanaiwa Zenigo Park

Daitokugawa (Katsuragawa-bashi)

Harbor Sub-firestation

Monozukuri Kaikan Craft Ctr.

Awagasaki School Zone

0 200 400 800m

1:8,000

3

Map approved by the director of Geospatial Information Authority of Japan based on the Survey Act (R 6JHs 41)

4

Kanazawa Flood Hazard Map

Ono-machi

Flood (estimated flood scale)
that occurs approx.
once every 100 years

Rainfall criteria prerequisite for estimated flooding area designation

This hazard map shows the expected result of the following rivers overflowing due to the amount of rainfall detailed below (which only occurs approx. once every 100 years).

- Relevant rivers and rainfall amount:
Saigawa River: 314mm of rainfall in two days
Asanogawa River: 256mm of rainfall in two days

Estimated flooding areas and flood water depth may differ from the map due to rainfall exceeding the estimated scale, sediment, fallen trees, etc.

Legend

Designated emergency evacuation places

Schools, community centers, etc.

Parks, squares

Water level observation station, Water level gauge

River monitoring camera

Disaster prevention radio broadcast system

Evacuation information

Bridge / Underground passage

Bridge / Underpass

Dangerous points on the evacuation route

Bridge / Underground passage

Bridge / Underpass

Map symbols

Government office

Fire station / Fire brigade etc.

Police station / Police box

Hospital

Administrative boundary

School zone (block) boundary

Main highway

Note: School zone (block) boundaries shown on the map are approximate.

Estimated hazardous areas

Estimated flooding areas and flood water levels

5.0 m - Flooding above 2nd floor roof

3.0 - 5.0 m Flooding up to 2nd floor ceiling

0.5 - 3.0 m Flooding up to 1st floor ceiling

0 - 0.5 m Flooding up to adult knee

When the top floor is flooded:

Early evacuation

When the top floor is not flooded:

Evacuation *Note 1

Note 1: As an exception, taking shelter inside is also possible. Check the evacuation procedure.



Note 2: If evacuation is unsafe, take shelter inside (vertical evacuation)


Sediment disaster

Sediment disaster risk area

Sediment disaster hazard area

Early evacuation

Designated Evacuation Locations				
Facility Names		Address	Tel	Availability
Main	 Ono-machi Elementary School	1-15 Ono-machi	2 6 7 - 1 4 6 6	○
	 Ono-machi Kominkan Community Ctr.	1-8-5 Ono-machi	2 6 8 - 3 8 9 6	○

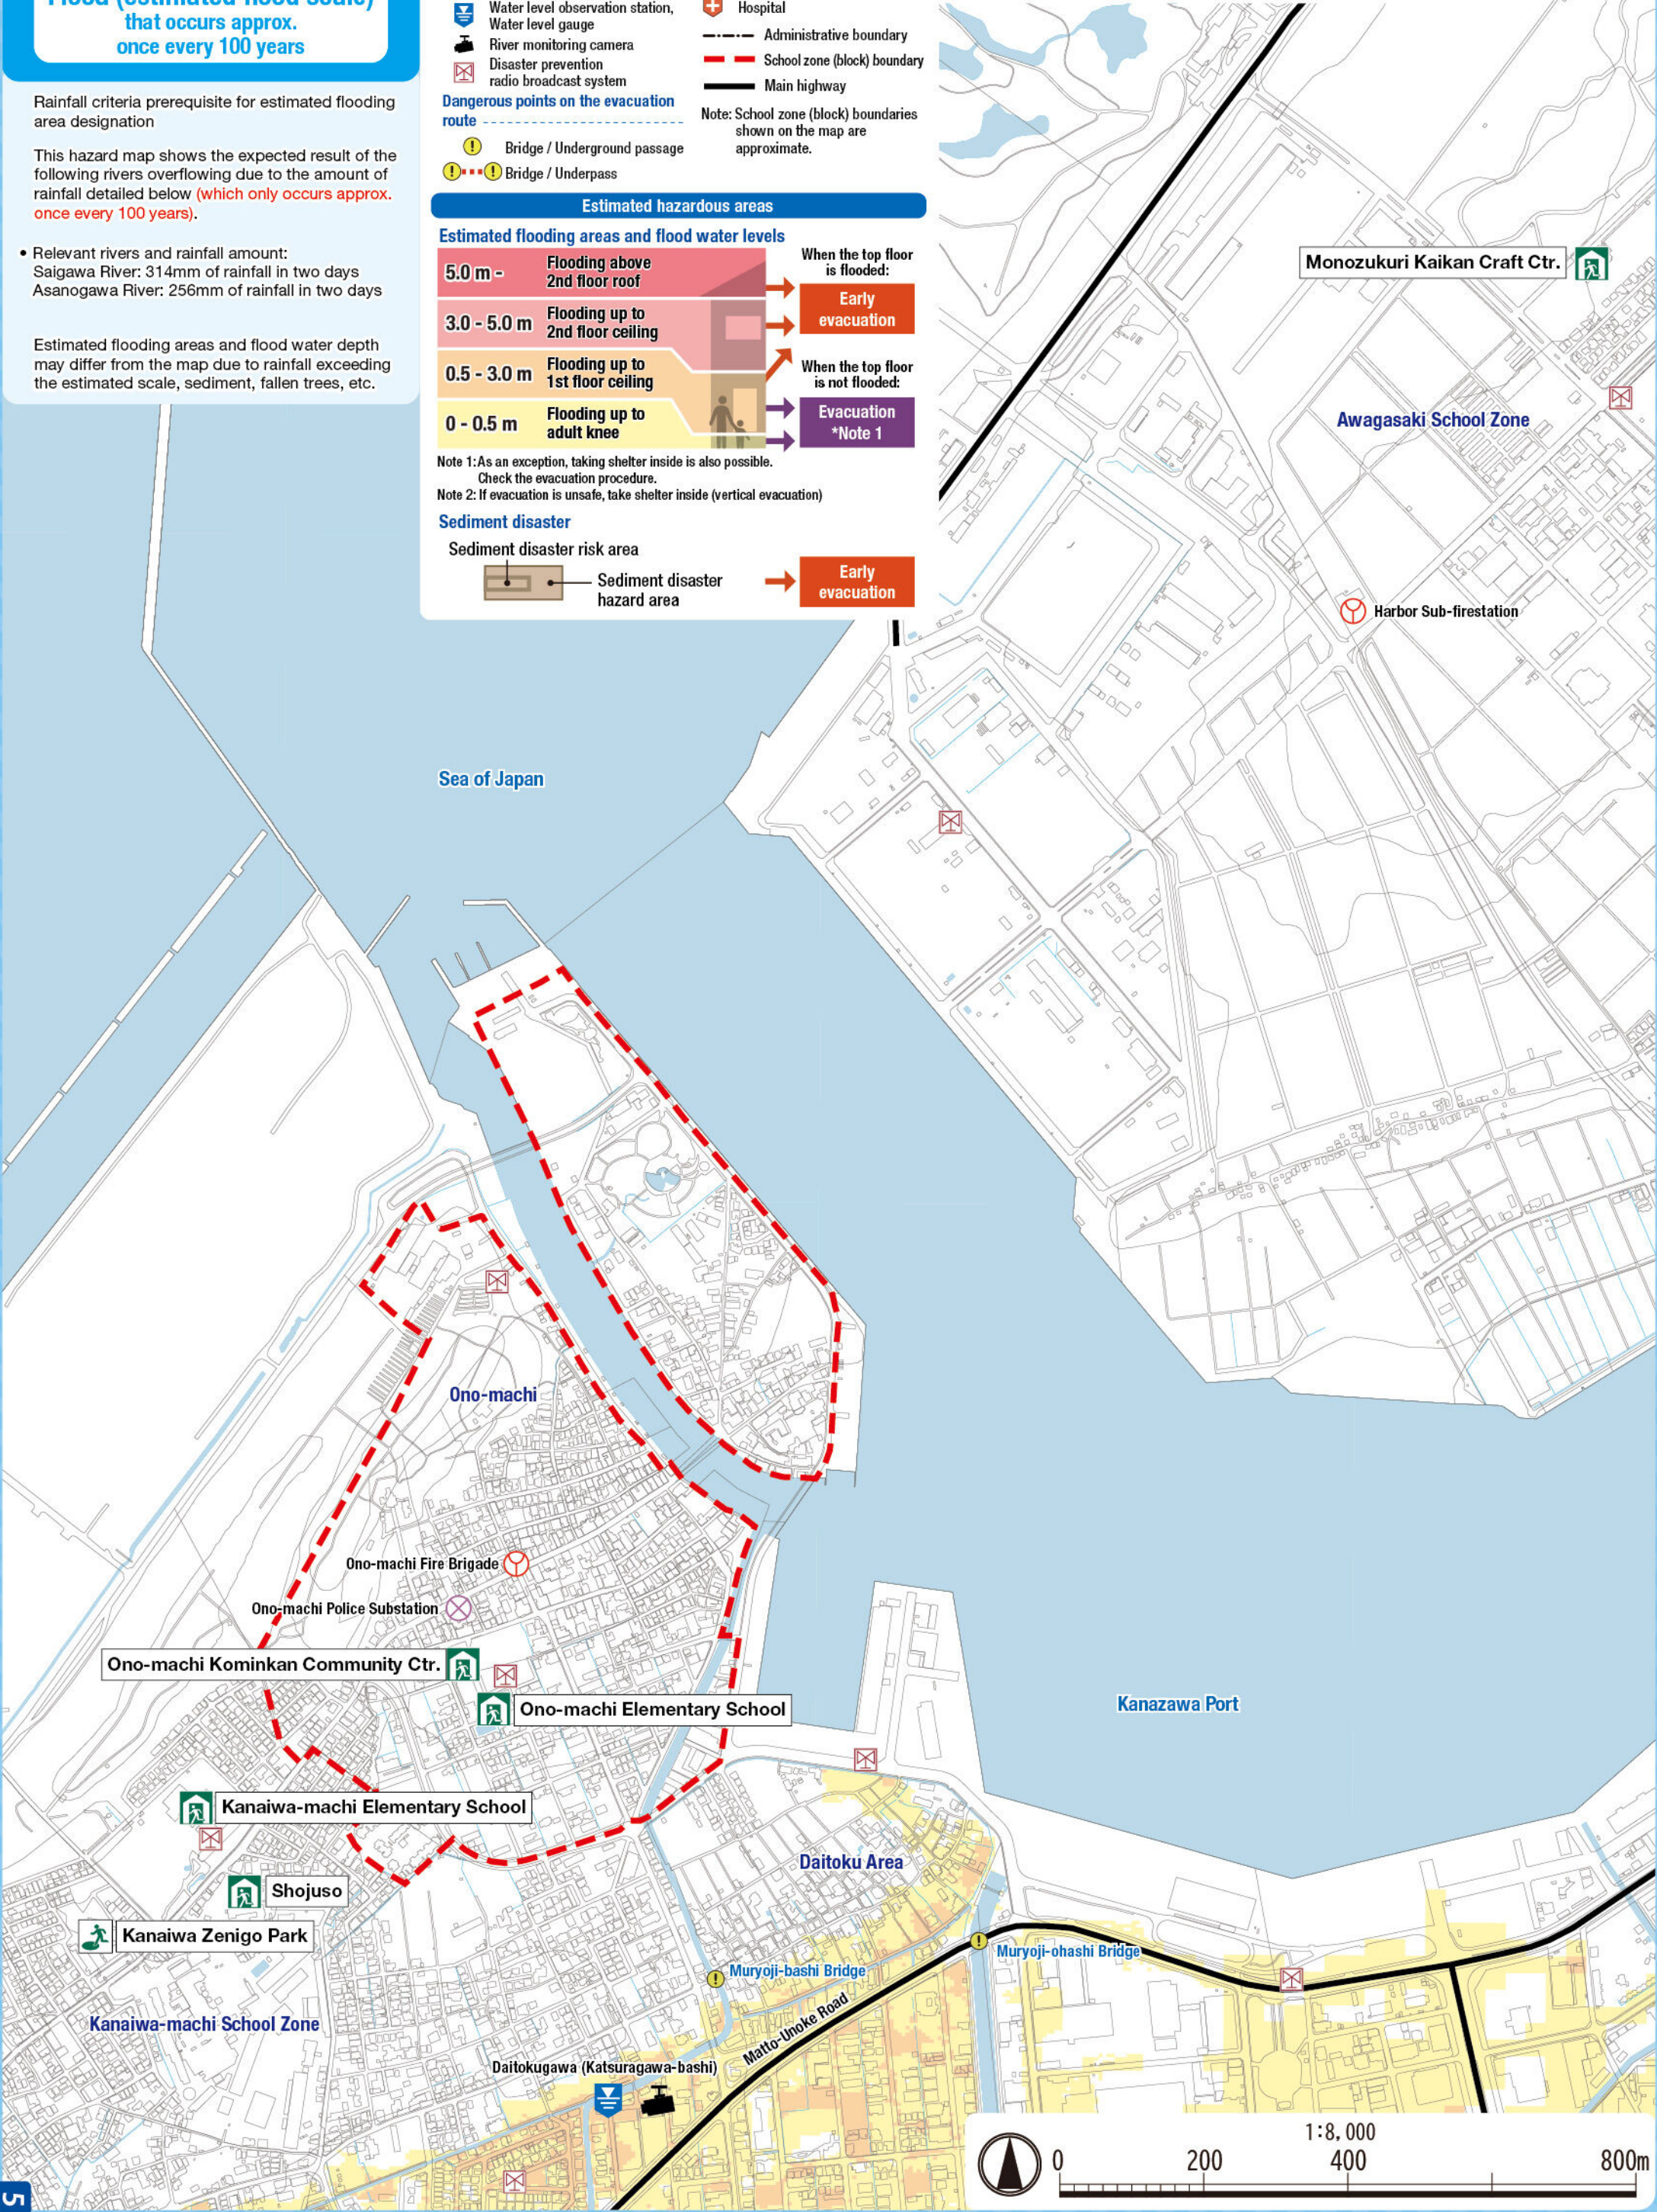

9

Kanazawa Flood Hazard Map

Ono-machi

Inland flood
(estimated maximum scale)
that occurs once every 1000 years or more

Rainfall criteria prerequisite for estimated flooding area designation

This hazard map shows the expected result of the amount of rainfall detailed below (which only occurs once every 1000 years or more) in the area of the sewage work plan.

Inland water: 130 mm of rainfall in one hour

Estimated flooding areas and flood water depth may differ from the map due to rainfall exceeding the estimated maximum scale, sediment, fallen trees, etc.

The areas shown on the map are not the estimated flooding areas based on the Flood Prevention Law. Please refer to the map to understand flood risks and evacuation actions during heavy rainfall.

Legend

Designated emergency evacuation places

Schools, community centers, etc.

Parks, squares

Water level observation station, Water level gauge

River monitoring camera

Disaster prevention radio broadcast system

Map symbols

Government office

Fire station / Fire brigade etc.

Police station / Police box

Hospital

Administrative boundary

School zone (block) boundary

Main highway

Dangerous points on the evacuation route

Bridge / Underground passage

Bridge / Underpass

Note: School zone (block) boundaries shown on the map are approximate.

Estimated hazardous areas

Estimated flooding areas and flood water levels

5.0 m - Flooding above 2nd floor roof

3.0 - 5.0 m Flooding up to 2nd floor ceiling

0.5 - 3.0 m Flooding up to 1st floor ceiling

0 - 0.5 m Flooding up to adult knee

When the top floor is flooded:

Early evacuation

When the top floor is not flooded:

Evacuation *Note 1

Note 1: As an exception, taking shelter inside is also possible. Check the evacuation procedure.

Note 2: If evacuation is unsafe, take shelter inside (vertical evacuation)

Sediment disaster

Sediment disaster risk area

Sediment disaster hazard area

Early evacuation

Historically flooded areas

Historically flooded areas

* Areas where flooding occurred due to heavy rain in 2008 or later

Designated Evacuation Locations			
Facility Names	Address	Tel	Availability
Main Ono-machi Elementary School	1-15 Ono-machi	2 67 - 1466	○
Ono-machi Kominkan Community Ctr.	1-8-5 Ono-machi	2 68 - 3896	○

The main map displays the Ono-machi area, bounded by a red dashed line. It shows various flood hazard zones in shades of yellow and orange. Key landmarks and facilities are labeled, including the Ono-machi Fire Brigade, Ono-machi Police Substation, Ono-machi Kominkan Community Ctr., Ono-machi Elementary School, Kanaiwa-machi Elementary School, Shojuso, Kanaiwa Zenigo Park, and Kanaiwa-machi School Zone. The map also shows the Sea of Japan, Kanazawa Port, and the Daitoku Area. A scale bar at the bottom right indicates a scale of 1:8,000, with distances of 0, 200, 400, and 800m. A north arrow is also present.

Map approved by the director of Geospatial Information Authority of Japan based on the Survey Act (R 6JHs 41)